

## EPTTE1400

- Combined pressure and temperature measurement
- Lightweight stainless steel construction
- Long life, high performance

The **EPTTE1400** is a high quality all stainless steel combined pressure and temperature transducer, intended for use in the measurement of gases and liquids compatible with stainless steel.

The miniature design uses a hermetically welded, thin film measuring cell, coupled with high level output circuitry that is suitable for some of industries harshest environments, including automotive, industrial hydraulics,refrigeration, offroad, construction and agricultural applications.

The **EPTTE1400** offers measurement in gauge pressure, up to 25 bar and is backed by a one-year warranty.



### Specification

Performance		Environment	
<b>Pressure:</b>		<b>Temperature</b>	
Accuracy @ RT	< +/-0.8%	Temperature	-40° to 125°C
Stability (1 Year)	< ± 0.1 %	Shock	1000 G, 11 msec., 1/2 Sine
Overrange pressure	up to 4x rated pressure	Vibration	25 G peak, 20 to 2000 Hz
Burst pressure	up to 6x rated pressure	Sealing	IP 67
Pressure cycles	> 10 million	<b>Electronics</b>	
Pressure response time	<1ms	Excitation for output pressure	4 = 10-32 VDC for 0.5 – 4.5 V Output 5 = 5 VDC for 0.5 – 4.5 V Output
<b>Temperature:</b>		Output temperature	PT1000
Temperature range	-50 to +150°C linear output	Current consumption	< 10 mA
Accuracy	< ± 0.8 %	Reverse voltage protection	Yes
Non Linearity	<1%	<b>Mechanics</b>	
Temperature response time	<15s	Housing	304 stainless steel
		Wetted parts	17-4PH stainless steel
		Pressure port	see select table
		Electrical connection	see select table
		Weight	ca. 40 g

### Ordering information

(Please use the characters in the chart below to construct your product code)


Stock model: **EPTTE1400-K-01000-B-4-A**

Sample Code: **EPTTE1400 - K - 01000 - B - 4 - A**

Series	Port Configuration	Measurement Range	Pressure Unit	Output Signal	Electrical Interface
EPTTE1400	K = M8 x 1	The sensor is available up to 25 Bar (Temperature: -50 to +150°C linear output)	B - gauge pressure	4 = 0.5 – 4.5 V (with 10-32 VDC supply) 5 = 0.5 – 4.5 V ratiometric	A - 600 mm cable E - Booted with 600mm sleeved cable
<b>Pressure Range</b>					
Bar	2.0	6	10	16	25
Order Code	00200	00600	01000	01600	02500

Custom options available on request  
The EPTTE1400 series is backed by a 1 Year Warranty.  
The purchaser is responsible for compatibility of the media, functional adequacy and correct installation of the transmitter.

### Dimensions & wiring

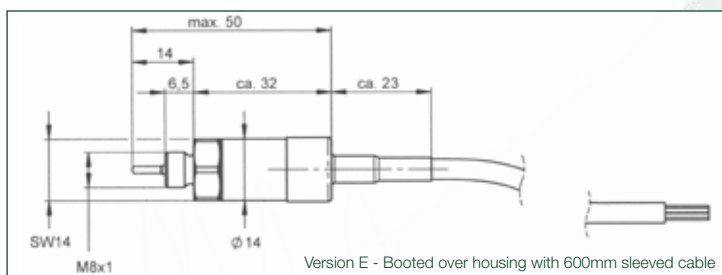

Output	Red	Black	White	Blue/Green
Pressure 0.5-4.5V Temp. PT1000	+ Pressure	- Pressure	Output pressure	Output Temperature



Version A - with 600mm sleeved cable